

# Building a Humidor

*Maintaining tropical humidity  
in a box takes precise joinery  
and Spanish cedar*

by Rick Allyn



*Not just pretty boxes—Humidors need to be carefully constructed if they are to maintain the right humidity for cigars.*

**Y**ou can smoke a dry cigar, but you won't enjoy it. It will burn too hot, making the smoke acrid and unpleasant. Most of the flavor and all the subtleties of the tobacco will be lost. Cigars are made in the tropics where the relative humidity is a constant 70%, and they should be kept at that level. The relative humidity in Southern Idaho, where I live, is about 30% in the summer, and lower in the winter—a really hostile environment for cigars.

I have had cigars dry up, even unwrap, four hours after I bought them.

A properly functioning humidor is a necessity for enjoying good cigars anywhere outside of the tropics. With only monthly upkeep, a well-made humidor will preserve cigars indefinitely. Very fine cigars even improve when aged in a humidor.

Building a humidor that works is not as simple as making a nice box and fitting a humidification device in it. This is often

how they're made, and the results are cigars ruined from too little or too much moisture. Maintaining 70% humidity is a balancing act that depends in large part on the wood you use and the tightness of the lid's seal. It's not rocket science, but making a good humidor takes some care in design and execution.

## **Why use Spanish cedar?**

The wood you choose to make and line the humidor is particularly important. It

should not have an unpleasant smell or taste because the cigars will pick it up. The wood also should be porous so it will first absorb, then release moisture evenly, while remaining dimensionally stable. The wood will reach 70% moisture content on the inside, while the humidity on the outside could be as low as 20%. For many woods, this is a recipe for severe cupping.

Spanish cedar is the traditional and best choice for a humididor. When kiln dried, it is very stable and will not warp or grow much when it reaches 70% moisture content. Its oils inhibit the growth of molds and mildew that destroy cigars. Spanish cedar has a delicate aroma that is complementary, enhancing the cigar's taste.

Spanish cedar does have one serious problem: bleeding sap. It will ooze out of the wood, stick to your cigars and ruin them. Pieces that look sap-free can bleed many months after the humididor is finished. Common advice is that South American cedar (*Cedrela fissilis*) has a sap problem, and the Central American varieties (*Cedrela odorata* and *C. mexicana*) do not. However, I have found little difference between them. There are ways to reduce the problem with sap. The thinner you slice the cedar, the less sap the piece will bleed later. Kiln drying, if well done, will set the sap. And if you do get some sap on the surface, acetone or lacquer thinner will take it off.


### One-sided veneering for the basic box

Because I build humidors professionally, I make a variety of designs. But they're all simple and easy to build. The only joints are rabbets and grooves. I use Spanish cedar for the sides and the top, veneering only the outside. I glue up the whole box at once, and put a solid-wood edge-band along every side. Then I cut the box into top and bottom halves on a bandsaw. One of my favorite styles uses pau ferro (*Machaerium spp.*) veneer with wenge edge-banding and holly and mahogany inlay (see the photo on the facing page).

The most common box size I make is 12 in. by 9 in. by 5 in. with internal dimensions of 10½ in. by 7½ in. by 3⅞ in. It will store about two boxes of cigars, 50 in all. Cigars range from 4½ in. to 8 in. long and 35 to 52 ring size (about ½ in. to just over ¾ in. dia.). Most commonly, however, they

## Simple joinery makes a sturdy box

The front, back and sides of the box are cut from one long piece of veneered Spanish cedar. The top is veneered MDF; the bottom is plywood. All the joints are rabbets and depend on precise fitting for strength.

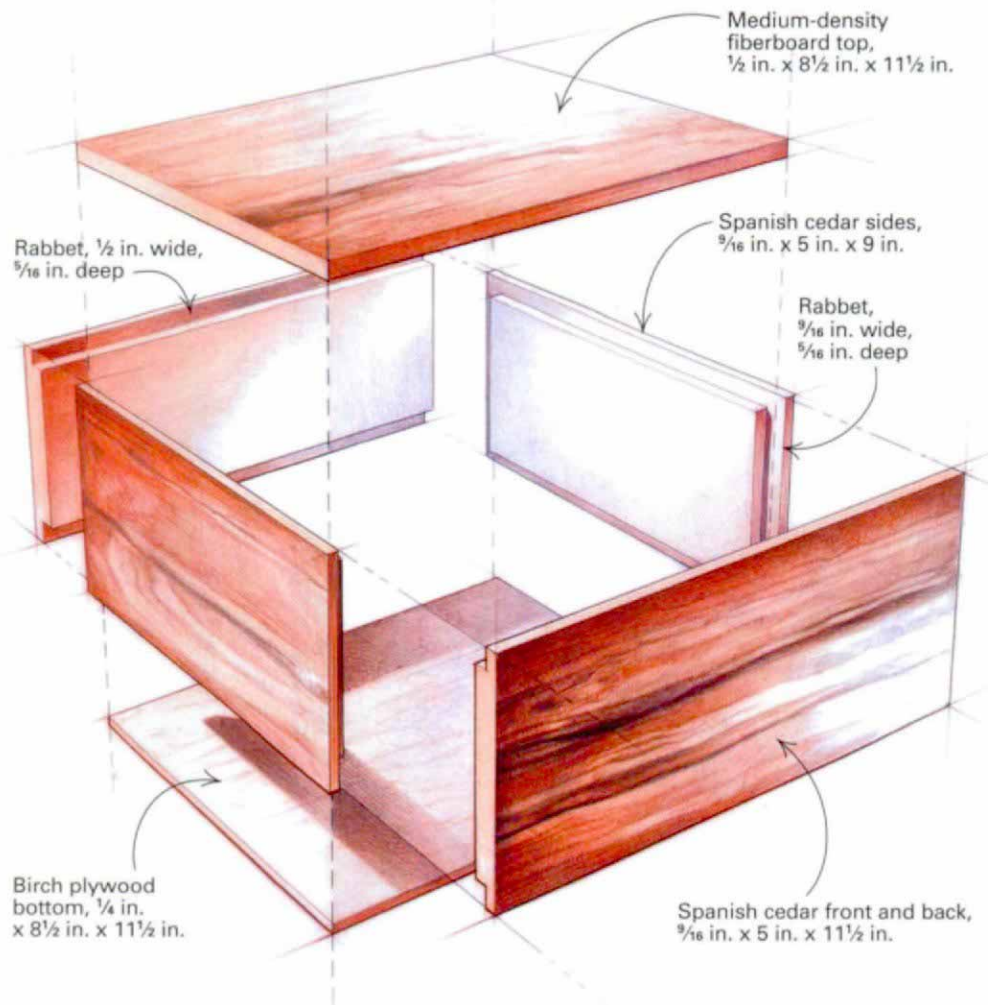

**Rabbit the four sides at once, while they're still one piece. A dado blade will make the cut in one pass.**



**Cut the rabbeted sides apart and to length on the table saw. Use a stop block to ensure consistent lengths.**




*Tablesaw makes the edge-banding and inlay joints a cinch. Four cuts along each edge create the necessary joints.*


## Rabbets for edge-band and inlay



For the edge-banding, make  $\frac{1}{4}$ -in.  $\times$   $\frac{1}{4}$ -in. cuts along the top and sides. Make the bottom cuts  $\frac{1}{4}$  in.  $\times$   $\frac{1}{8}$  in. deep.

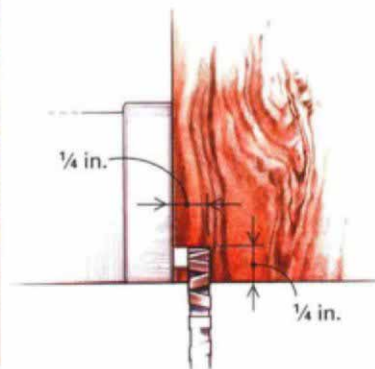

For the inlay, make  $\frac{1}{8}$ -in.  $\times$   $\frac{1}{16}$ -in.-deep cuts along the edge-banding rabbets.

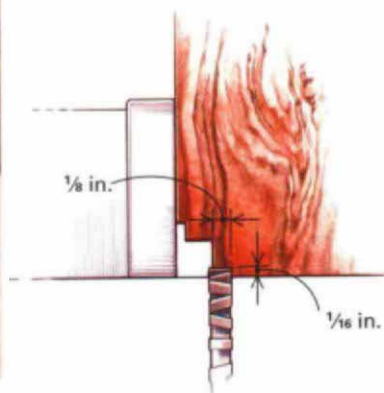

are about 6 in. long by 42 ring. If you buy a much longer cigar, it can go in sideways.

For the front, back and two sides, I mill a single piece  $\frac{9}{16}$  in. thick, 5 in. wide and about 48 in. long. For the top, I use a piece of  $8\frac{1}{2}$ -in. by  $11\frac{1}{2}$ -in. medium-density fiberboard (MDF),  $\frac{1}{2}$  in. thick. The MDF adds weight to help keep the lid closed. I veneer all the Spanish cedar on one side, but for the bottom, I use  $\frac{1}{4}$ -in. birch plywood without any veneer.

Now, I know we all have been taught to veneer both sides of anything, but this is an exception. Perhaps it is a combination of things that makes it work: the stability of the cedar, the stability of the box construction, the constant humidity on the inside, the lacquer finish on the outside. Anyway, it works. I have never had a box come apart using this technique.

With a dado head, I cut  $\frac{1}{2}$ -in.-wide rabbets  $\frac{5}{16}$  in. deep along both long edges of the piece of cedar. Next I cut it to the lengths necessary for the front, back and

side pieces. On the side pieces only, I cut  $\frac{9}{16}$ -in.-wide rabbets  $\frac{5}{16}$  in. deep on the ends to form the corner joints (see the drawing on p. 45).

I dry-clamp the front, back and sides together with several band clamps. Only at this point do I carefully trim the top and bottom to size in a crosscut box for an exact fit. The joints of the top and bottom provide a great deal of strength to the humidior and should be right on.

After the dry-fitting, I glue the box together. I use a reactive polyurethane glue from Custom-Pak Adhesives (11047 Lamb's Lane, Newark, OH 43055; 800-454-4583) because it is waterproof, sets slowly enough to make clamping up a stress-free job and has a clamp time of just over an hour.

Waterproof glue is a necessity on the corner joints because they will eventually live in a high moisture environment. Even the waterproof type II polyvinyl acetate (PVA) glues will eventually let go if exposed to so much water for long. At the same time, I

have used regular PVA glue for the veneering, edge-banding and inlay without a problem. Because the polyurethane glue is activated by moisture, I spray a little water on the joints before gluing up the box.

### Edge-banding to resist wear

Spanish cedar is a soft, lightweight wood, and the veneer isn't much more durable. I use a hard, solid wood edging for protection against the dings and dents that come with everyday handling. I add inlay along the edge-banding for contrast. The result is visually pleasing and reasonably durable.

After the box has been glued together, I cut rabbets along each edge of the box for the edge-banding (see the photos and drawings above). I make the rabbets  $\frac{1}{4}$  in. by  $\frac{1}{4}$  in. along the top and sides. And I make them  $\frac{1}{4}$  in. by  $\frac{1}{8}$  in. deep on the bottom because the edge is thinner.

Along the cuts for the edge-banding, I make a second series of cuts for the inlay,  $\frac{1}{8}$  in. wide and  $\frac{1}{16}$  in. deep. The veneer on

the edge of these cuts cannot have any breakout. I use an alternate-bevel, 80-tooth blade to cut the cross-grain rabbets and a 24-tooth flat-top blade to cut the long-grain rabbets.

Next I cut the pieces of  $\frac{5}{16}$ -in.-sq. wenge edge-banding to length, fit and glue one piece at a time. Each piece simply butts against the other because the wenge end grain is difficult to discern from the long grain. First I apply the banding along the bottom edge, then around the top and, finally, along the sides. I use yellow glue and 3M long masking tape to clamp each piece (see the photo at right). This tape stretches for a stronger grip but won't pick up the grain when I pull it off.

When the edge-banding sets, I remove any squeeze-out from the inlay grooves with a small chisel. I cut the one-piece inlay to length and miter each corner. Then I run a bead of yellow glue down the groove and press in the inlay with the back of a chisel (see the bottom photos). Don't bother trying to clamp it in; the press-fit should hold it in place. When it dries, I plane the edge-banding level with the inlay and veneer, round the edges and file down the end grain on the corners. Then I use a cabinet scraper to smooth the whole box.


### **Bandsawing the box open and fitting the hardware**

Building the box in one piece and then slicing it open is the best way to ensure a perfectly matching top and bottom. I perform this delicate operation on a bandsaw with a  $\frac{1}{2}$ -in., 3 teeth-per-inch (tpi) blade with very little set. It makes this cut quickly and removes a minimum of wood.

I use a tall fence and set it so the top will be  $1\frac{3}{8}$  in. thick. Then I cover the cut line with masking tape to prevent breakout. With a careful push through the saw, it's done (see the top left photo on p. 49). I use a cabinet scraper to smooth the edges and make them perfectly flat. Ideally, the joint should be hard to distinguish when the box is closed. I use Brusso quadrant hinges (available from Whitechapel Ltd., P.O. Box 136, Wilson, WY 83014; 800-468-5534) because they are well made, look nice and are strong enough to keep the heavy lid from going anywhere. I install a box lock with a flush escutcheon on the outside.

### **The lining creates the seal**

For the lining, I use pieces of Spanish cedar  $\frac{3}{16}$  in. thick. The cedar covers all six sides inside the box and is fitted to create a seal

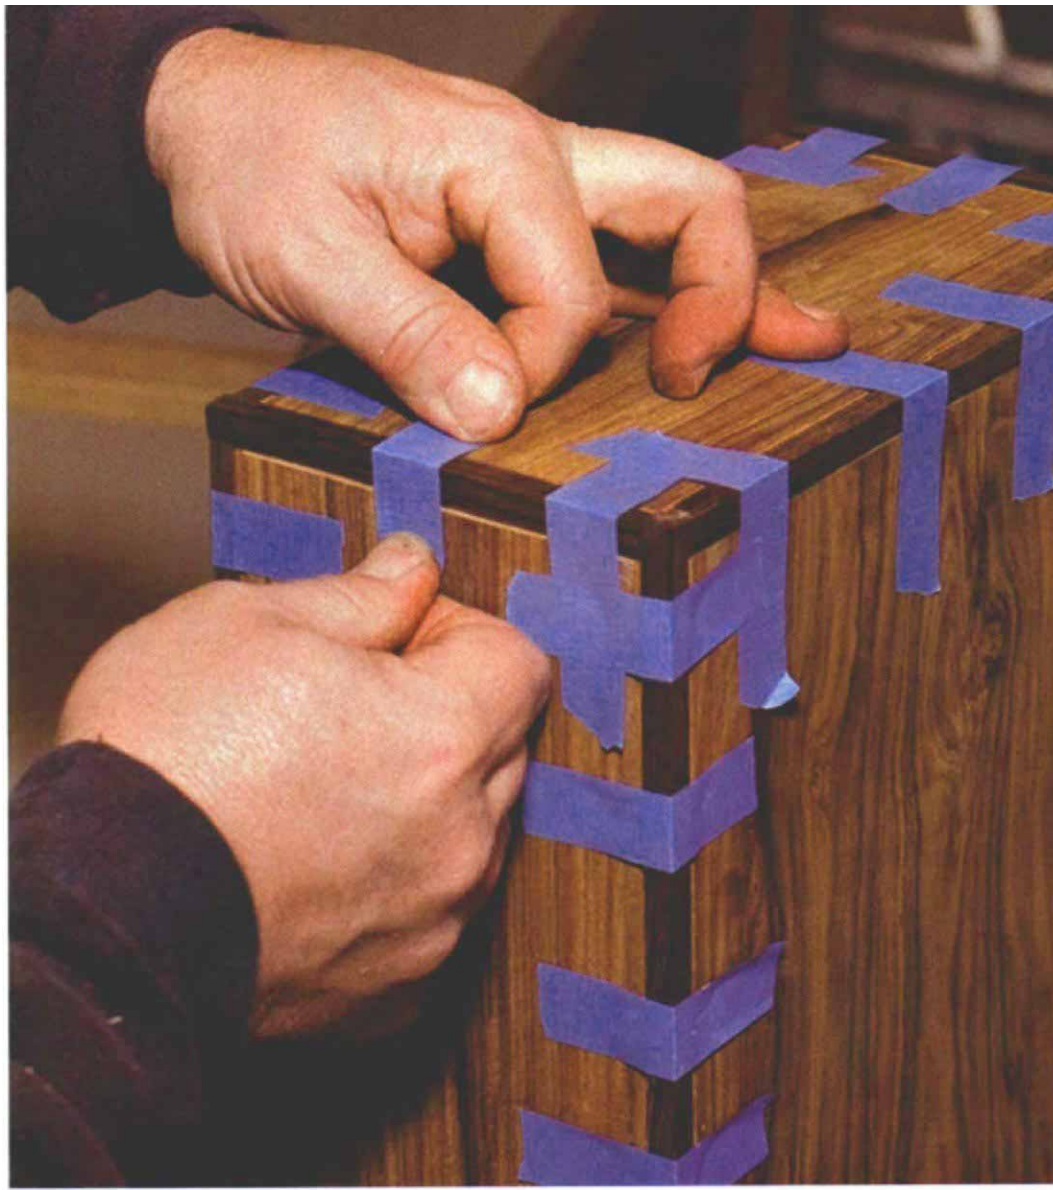

*Yellow glue and tape attach the edge-banding. Wenge edge-banding is butted at the corners, not mitered, because endgrain is not conspicuous.*




*Press the inlay into the groove with the back of a chisel (left). It should not need clamping or taping. Fine-tune the miter if necessary (below).*



## A box inside of a box

The Spanish cedar lining inside the humidor is in effect a second box. It maintains the humidity level by absorbing and releasing moisture from the humidifier. When the humidor's closed, the lining forms an almost-airtight seal around the edge.

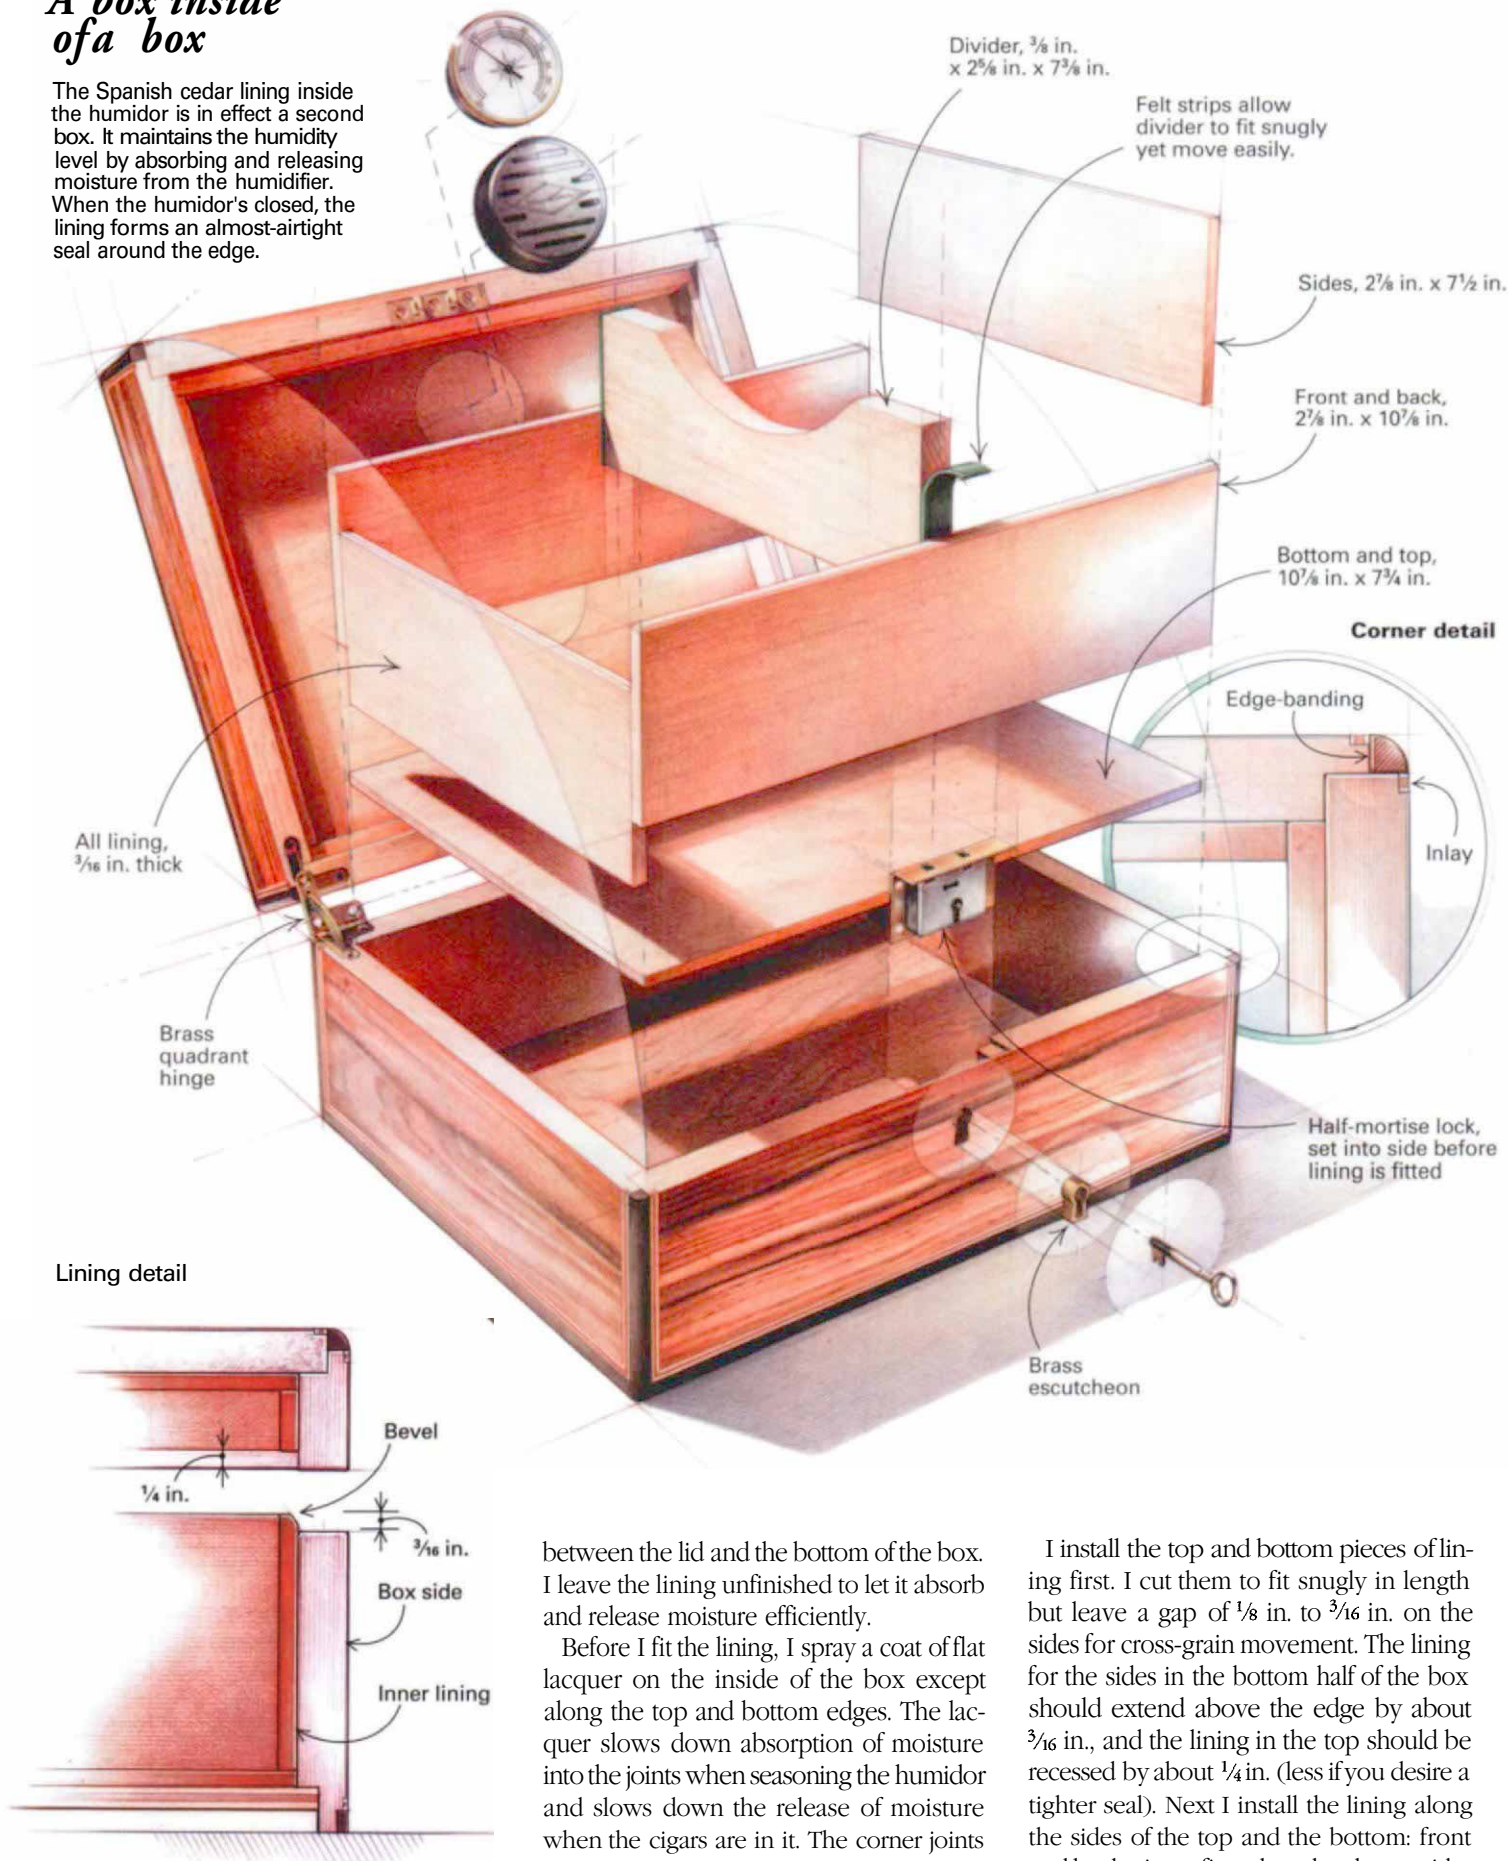

between the lid and the bottom of the box. I leave the lining unfinished to let it absorb and release moisture efficiently.

Before I fit the lining, I spray a coat of flat lacquer on the inside of the box except along the top and bottom edges. The lacquer slows down absorption of moisture into the joints when seasoning the humidor and slows down the release of moisture when the cigars are in it. The corner joints will appreciate the reduction in stress.

I install the top and bottom pieces of lining first. I cut them to fit snugly in length but leave a gap of  $\frac{1}{8}$  in. to  $\frac{3}{16}$  in. on the sides for cross-grain movement. The lining for the sides in the bottom half of the box should extend above the edge by about  $\frac{3}{16}$  in., and the lining in the top should be recessed by about  $\frac{1}{4}$  in. (less if you desire a tighter seal). Next I install the lining along the sides of the top and the bottom: front and back pieces first, then the shorter sides



**Saw the top off the box on a band-saw.** Tape the entire saw line, and use a 1/2-in., 3-tpi blade to avoid breakout.



**Gently press-fit lining around interior.** When you season the humidifier, the lining will swell and lock itself in place.

(see the top right photo). One thin bead of yellow glue down the middle of each piece will keep them centered during assembly.

The joint between the edge of the lid and the lining around the bottom will establish how well your humididor holds its humidity (see the drawing at left). If the joint's too tight, not only will the box be difficult to open and close, it also will force the humidity level beyond 70%, making the air musty from poor circulation and increasing the chance of mold. A damp cigar will not burn well, and it will produce smoke too thick and pungent to be enjoyable. Like wood, a cigar that absorbs too much moisture may split. And if left soggy for too long, a cigar will begin to rot. But too loose a joint will let in drafts and make it difficult for the humididor to reach 70% "relative humidity and remain there.

If you will be opening the humididor every few days, make the seal tight so that a dropped lid will float closed on a cushion of trapped air. If you won't be opening the humididor very often, make the seal less tight to help keep the air from becoming too damp.

Opening and closing should be easy, and you should just feel the lining touching on the lid as it shuts. For a tight seal, cut a steep bevel on the lining in the bottom of the box, and for a loose seal, make the bevel lower. The front needs more of a bevel than the sides and back so the lid opens and closes properly. I bevel all sides for even breathing and to maintain a continuity of style (see the photo at right).

### Finishing the humididor and installing a humidifier

I finish the outside with several coats of lacquer. I apply two or three coats of sanding sealer and then about 10 coats of gloss lacquer, sanding after every three coats. Af-

ter the last coat, I let the finish cure for at least a week and then sand with 1,000-grit and water and power buff with automotive glazing compounds. Let the finish cure for as long as you can before waxing.

The humidifier provides a source of moisture in the box. Most humidifiers are extremely simple. A sponge-like material, often florist's foam, is contained in a plastic or metal vented case. Because moisture from the humidifier falls, I attach the humidifier to the center of the lid for the most even distribution.

To help the humidifier stay put, I seal the cedar right behind it with lacquer. Even with the humidifier at the top of the box, the bottom will be more humid. If you leave cigars in your humididor for a long

time, rotate their position once a month.

The humidifier I prefer to use is the Nonpareil (available from Beall Tool Co., 541 Swans Road N.E., Newark, Ohio 43055; 800-331-4718). It is made of anodized aluminum and uses a removable and easy-to-clean urethane foam pad. This eliminates the need to mess with distilled water because mineral deposits that would otherwise clog the humidifier can be washed out. Many humidifiers do not come apart for cleaning.

Before you put any cigars in your humididor, it's essential to season it first. After I fill the humidifier, I put a cup filled with wet paper towels in the closed humididor. It will take a few days for the box to reach 70% moisture content.

To monitor the humidity level of your humididor, you can attach a hygrometer (available from Woodcraft Supply, P.O. Box 1686, Parkersburg, WV 26102; 800-225-1153) to the bottom of the lid in the same way that you did with the humidifier. Remember that dial hygrometers are rarely accurate. The feel of the cigar is always the best measure of a properly functioning humididor. A good cigar should feel soft but not spongy or crunchy. □

*Rick Allyn used to make guitars, but now designs and builds studio furniture and humidors. He attended the College of the Redwoods. He lives in Twin Falls, Idaho.*





**Careful with that bevel angle.** It determines the rate the humididor loses humidity and receives fresh air. A humididor that is opened frequently should have a tighter fitting lid.

## *More than one way to store a stogie*

Last year, the United States imported 293 million cigars from its southern neighbors, an all-time record. This year, that number will probably double. Like the recent stock market, this cigar boom may be the result of irrational exuberance. But in its wake, a huge demand for fine humidors has followed—a boom in its own right and a windfall to woodworkers. Though there are thousands of plain, manufactured boxes on sale everywhere, a few woodworkers have been making humidors that display the finest craftsmanship and imagination. A few that we've found are shown on these two pages. □

*Strother Purdy is an assistant editor of Fine Woodworking.*

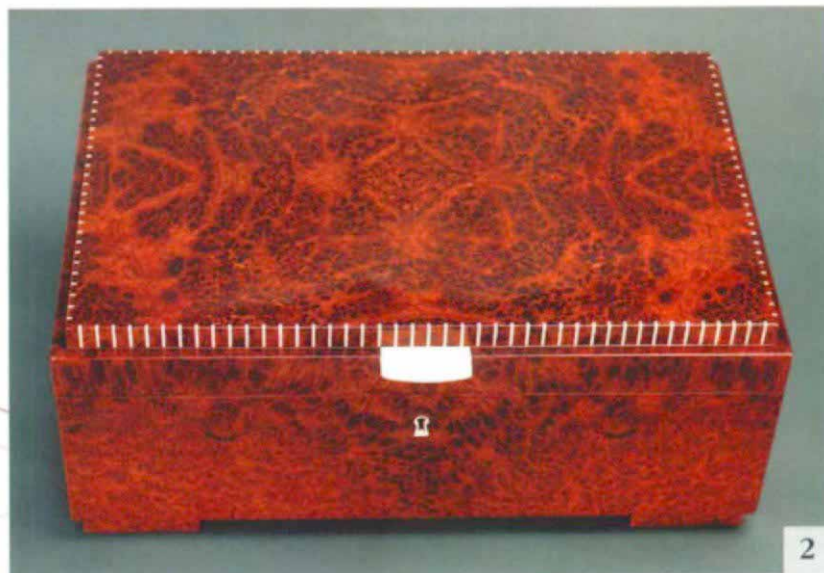

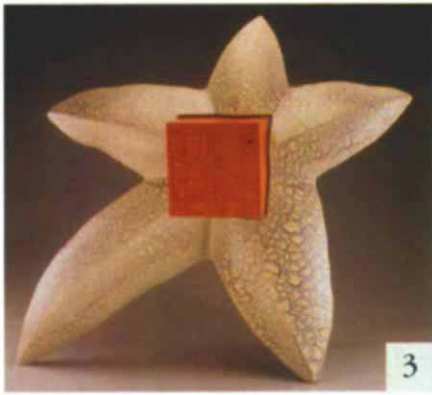

**1. Humidor table by James Gray**—Eastern walnut, wenge, tagua nut, red gum eucalyptus and Spanish cedar; 36 in. high by 20 in. wide by 44 in. long. Photo: Lee Fatherree

**2. Rublmann-style humidor by Frank Pollaro**—Amboyna burl, ivory and Spanish cedar; 6<sup>3</sup>/<sub>8</sub> in. high by 10 in. wide by 15 in. long.

**3 & 4. Forbidden by Wendell Castle**—Jelutong, lacewood and Spanish cedar; 58 in. high by 72 in. wide by 20 in. deep. Photos: David Mohny

**5. Humidor by Ken Frye**—Pearwood, madrone burl and Spanish cedar; 6 in. high by 9 in. wide by 12 in. long. Photo: Craig Cook

**6. Newporter by John Goff**—Cuban mahogany and Spanish cedar, 5<sup>3</sup>/<sub>4</sub> in. high by 9<sup>3</sup>/<sub>4</sub> in. wide by 17 in. long. Photo: Kevin Halle

